

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 22 TOWNSHIP 15 RANGE 4

DATE: 7-20-03 ~~3-21-2000~~

PARTY CHIEF: ~~Wilcoxon~~ Kiste

CREW:

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 4-22-96

IN. S.P.C. E ZONE, NAD 83

NAME: 15042201

N: 498548.2157(m)

E: 64341.7509(m)

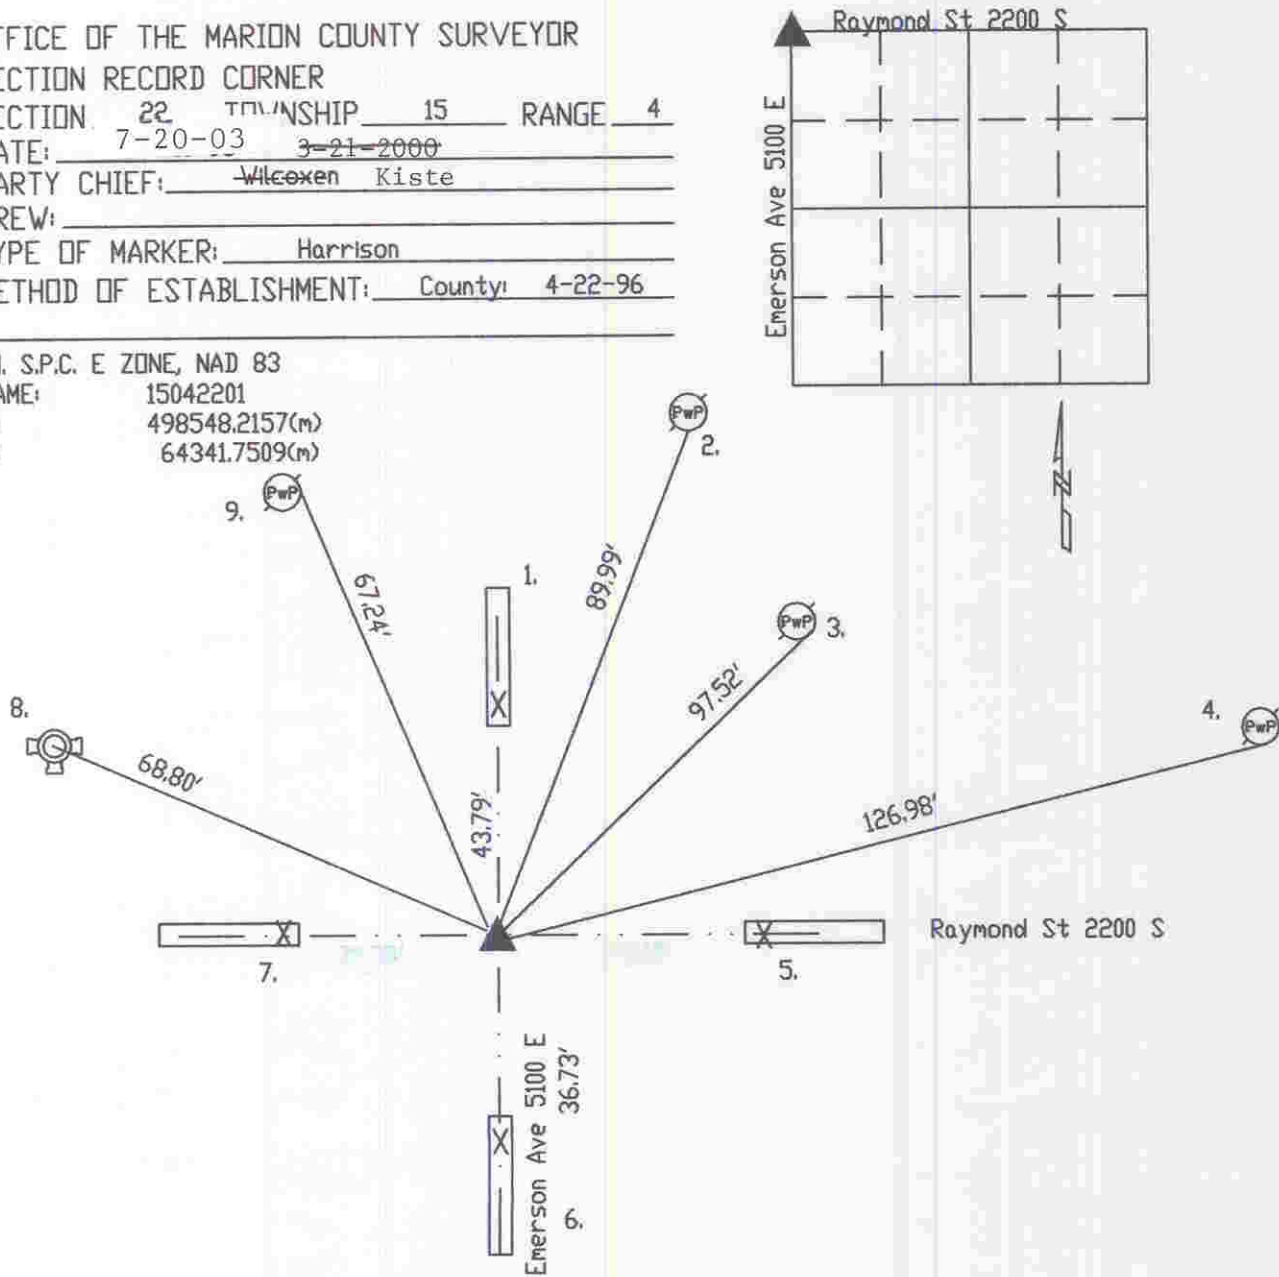

Original post set 1820 by John Hendricks with witnesses: 24' beech S 14 E 13 links, 18' dogwood N 7 E 24 links per Marion County Atlas pg. 10. Survey by D.B. Hosbrook 8-10-1853 called no stone nor witnesses per Warren Township Legal Survey Book pg. 24. MCSO 5-1-51 called an iron pin. Hankins 1-13-59 called an iron pin 3' down. SeFranka 5-10-72 called same. Wilcoxon 10-16-75 called a tack nail. Warner 7-25-85 called same. Jacobs 10-20-88 called same. Wilcoxon 4-22-96 called PK nail. Excavated by Wilcoxon 9-10-98 and PK nail found at surface. Harrison set.

HC542201

REF.	DISTANCE	DESCRIPTION
1.	43.79'	Due N to cut 'x' S-end of median
2.	89.99'	PK nail S light pole #359-614D 36'up
3.	97.52'	PK nail E light/PwP#45-619A 24'up (PwP#45-614A)
4.	126.98'	PK nail SE light/PwP#357-614A 8'up
5.	10.40'	Due E to cut 'x' W-end of median
6.	36.73'	Due S to cut 'x' N-end of median
7.	37.33'	Due W to cut 'x' E-end of median
8.	68.80'	Top nut of fire hydrant
9.	67.24'	PK nail E PwP#314-613A 24'up